

PLOOITENT - TECHNISCHE SPECIFICATIES

TENTE PLIANTE - SPECIFICATIONS TECHNIQUES




**UV-BESTENDIG
BRANDVERTRAGEND - M2
100% WATERDICHT**


**RÉSISTANTE AUX UV
IGNIFUGÉE - M2
100% ÉTANCHE**




AFMETINGEN-DIMENSIONS




Type 2.5 x 2.5m




Type 2.5 x 5m




Type 3 x 3m




Type 3 x 4.5m




Type 3 x 6m




Type 4 x 4m



Type 4 x 6m



Type 4 x 8m




Type 6m HEX

SPECIFICATIES-SPECIFICATIONS

Afmetingen Dimensions	2.5x2.5m / 2.5x5m / 3x3m / 3x4.5m / 3x6m / 4x6m / 4x4m / 4x8m / 6m hex
Hoogte Hauteur	3.06m - 2.5x2.5 / 2.5x5 3.30m - 3x3 / 3x4.5 / 3x6 / 4x6 3.89m - 4x4 / 4x8 4.12m - 6m hex
Hoogte doorgang Hauteur d'entrée	2.00m - 2.5x2.5m / 2.5x5m / 3x3m / 3x4.5m / 3x6 2.12m - 4x4 / 4x6 / 4x8 / 6m hex
Dakspanning Système de tension du toit	Veer van 75mm Ressort de 75mm
Bouten en moeren Visserie	Inox, afgerond Inox, arrondi
Basisprofiel-Profilé	40 x 40 x 2mm
Voet-Pied	Gegalvaniseerd Staal-Acier galvanisé
Verbindingen in aluminium-Pièces de jonction en aluminium	
Frame-Structure	ALU 6005/T5
Dakzeil-Bâche de toit	Polyester 420D 320gr/m ² of/ou PVC 580gr of/ou PVC light 450gr

PROFIELEN-PROFILES

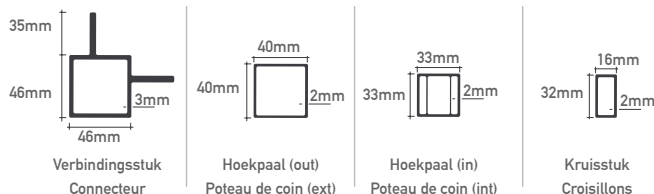

VERKOOP VAN TENTEN EN ULAGGEN
VENTE DE TENTES ET DE DRAPEAUX

WWW.PARTYSPACE.EU